


RCCD-410-3 Dimensions and Specification (Nominal 3 Ton Bypass Capacity)

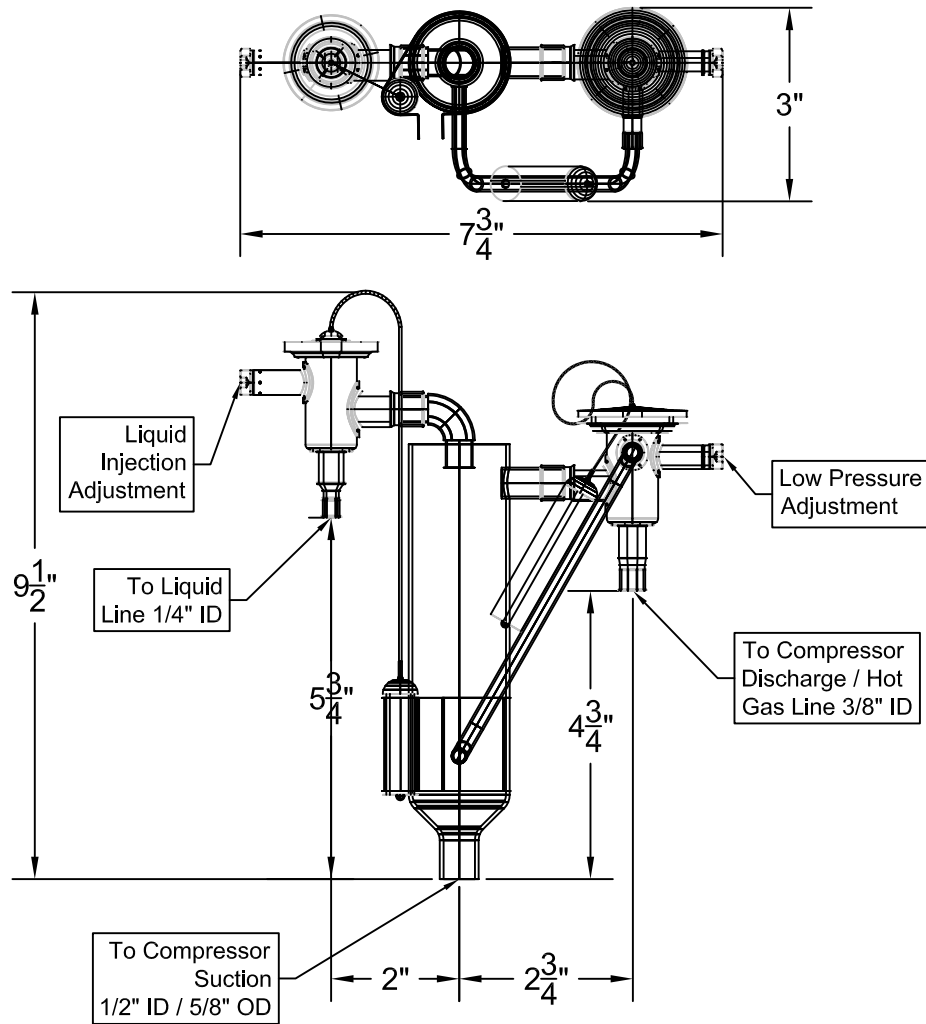

Liquid Injection Valve is factory adjusted and does not require field adjustment.

Low Pressure Regulating valve may be field adjusted to required evaporator pressure.

Remove and protect bulbs while soldering.

Bypass capacity at different condensing temperatures:

5.04 TR @ 104°F

4.32 TR @ 86°F

3.24 TR @ 68°F.

Bypass capacity must be selected depending on the system capacity and configuration to ensure oil return to the compressor. Please consult your RCCD representative for details.